



Truefashion Projector GCGM

RS700B LED30 930PC PSU MB WH

Lens

Truefashion Projector is offering a retail segment with attractive outlook design, excellent quality of light & dedicated light recipe as well as system connectivity, to create a comfortable ambiance and impressive shopping experience to stimulate the store sales for retail customers.

Warnings and Safety

- 3 years

Product data

General Information	
Light source color	930 warm white
Optical cover/lens type	Lens
Control interface	-
Protection class IEC	Safety class II (II)
CE mark	CE mark
Number of products on MCB of 16 A type B	1
Light source engine type	LED

Operating and Electrical	
Input Voltage	220 to 240 V
Input Frequency	50 or 60 Hz
Power Factor (Min)	0.95

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Housing Material	Aluminum
Optical cover/lens material	Polymethyl methacrylate
Optical cover/lens finish	-
Overall height	100 mm
Overall diameter	111 mm
Color	White RAL 9003

Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	-

Truefashion Projector GCGM

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	2669 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	87 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	>90
Initial input power	31 W
Power consumption tolerance	+/-10%

Application Conditions


Ambient temperature range	-15 to +35 °C
---------------------------	---------------

Product Data

Full product code	911401521471
Order product name	RS700B LED30 930PC PSU MB WH
Order code	911401521471
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	911401521471
Net Weight (Piece)	0.630 kg



Dimensional drawing

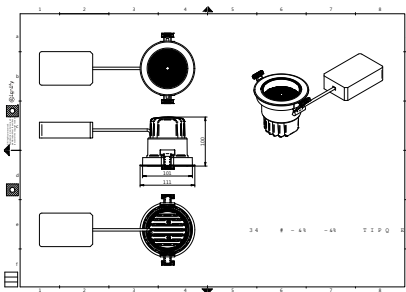

Spotlight/ projector LED

