



# Truefashion Projector GCGM

## RS700B LED40 930PC PSU MB WH

### Lens

Truefashion Projector is offering a retail segment with attractive outlook design, excellent quality of light & dedicated light recipe as well as system connectivity, to create a comfortable ambiance and impressive shopping experience to stimulate the store sales for retail customers.

### Warnings and Safety

- 3 years

### Product data

General Information		Controls and Dimming	
Light source color	930 warm white	Dimmable	No
Optical cover/lens type	Lens	Mechanical and Housing	
Control interface	-	Housing Material	Aluminum
Protection class IEC	Safety class II (II)	Optical cover/lens material	Polymethyl methacrylate
CE mark	CE mark	Optical cover/lens finish	-
Number of products on MCB of 16 A type B	1	Overall height	100 mm
Light source engine type	LED	Overall diameter	111 mm
Operating and Electrical		Color	White RAL 9003
Input Voltage	220 to 240 V	Approval and Application	
Input Frequency	50 or 60 Hz	Ingress protection code	IP20 [ Finger-protected]
Power Factor (Min)	0.96	Mech. impact protection code	-

# Truefashion Projector GCGM

## Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3429 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	85 lm/W
Init. Corr. Color Temperature	3000 K
Init. Color Rendering Index	>90
Initial input power	40 W
Power consumption tolerance	+/-10%

## Application Conditions


Ambient temperature range	-15 to +35 °C
---------------------------	---------------

## Product Data

Full product code	911401522171
Order product name	RS700B LED40 930PC PSU MB WH
Order code	911401522171
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	911401522171
Net Weight (Piece)	0.630 kg



## Dimensional drawing

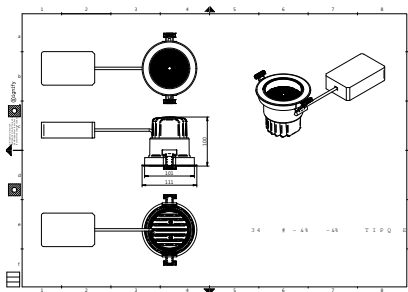

Spotlight/ projector LED

